

TEST/MUAYENE RAPORU



EUROLAB LABORATUVAR HİZMETLERİ

TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

5190243IB02

2021111021



Overall Rating:

PASS

Report No:

2021111021

Applicant:

Höpke Möbelstoff-Handels GmbH

Contact Person:

Hilmar CARL

Contact Telephone:

095657960

Contact e-mail:

hilmar.carl@hoepke.de

Sample Accepted on:

23.09.2021

Report Date:

11.10.2021

Total number of pages:

6 (Pg)

Sample ID:

RIO FR

	TEST	METHOD	RESULT
			PASS
*	Fire behaviour of building materials and elements Part 1: Classification of building materials Requirements and testing	DIN 4102-1	B2



Seal

Customer Representative Merve Nur KIRVELİ

K.rvefi

Laboratory Manager Merve ÖZLÜ





EUROLAB LABORATUVAR HİZMETLERİ TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

EUROLAB ® (TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.)

It is prohibited to change any and all versions of this document in any manner whatsoever. In case of a conflict between the electronic version (e.g. PDF file) and the original paper version provided by EUROLAB®, the latter will prevail.

TÜRCERT Teknik Kontrol ve Belgelendirme A.Ş. disclaim liability for any direct, indirect, consequential or incidental damages that may result from the use of the information or data, or from the inability to use the information or data contained in this document.

The contents of this report may only be transmitted to third parties in its entirety and provided with the copyright notice,

prohibition to change, electronic versions' validity notice and disclaimer.

Environment

The requirements and standards apply to equipment intended for use in,

Х	Residential (domestic) environment	
Х	Commercial and light-industrial environment	
Х	Industrial environment	
Х	Medical environment	



PR33-F01/08.10.2015/Rev:17.01.2017-R01

Page 2 / 6





EUROLAB LABORATUVAR HİZMETLERİ TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

DIN 4102-1

Scope

The standard applies to the classification of the fire behavior of building materials to assess the risk as a single building material and in combination with other building materials.

Building Material Classes

The building materials are classified according to their fire behavior into the building material classes according to Table 1:

Building Material Classes	Building Inspectorate Designation
A	
A1	Non-combustible building materials
A2	
В	Flammable building materials
B1	Flame retardant building materials
B2	Normally flammable building materials
В3	Easilly flammable building materials

Building material class B2

Procedure:

- Ignitibility test: The ambient temperature of the test room is to be about 20 °C. Mount the specimen in the holder/frame and suspend the entire frame vertically in the cabinet. Position the burner vertically to set the flame height to 20 mm, then tilt the burner to a 45° angle and place it in the cabinet.
- For bottom edge ignition testing, position the burner so that flame is applied to the bottom edge of the specimen at the centre of its width and thickness. For specimens with a thickness greater than 3 mm, apply the flame to the lower surface of the specimen at the least favourable point in terms of fire behaviour. The front edge of the burner's stabilizer is to be 16 mm away from the specimen's bottom edge, measured along the nozzle axis.
- Where surface ignition testing is necessary, burner placement and flame impingement shall be. The flame shall be applied to the centre of the specimen's width.
- Apply the flame for 15 seconds and then pull the burner back, taking care not to create any draught. Measure the time it takes for the flame tip to reach the gauge mark.
- Multi-layered materials are to be tested and as specified in subclause, except that the flame is to be applied to the least favourable point on the specimen's front edge.
- -If materials are to be used in composite structures together with other materials, these shall be tested together.

Requirements For Classification

Building materials, with the exception of floor coverings, meet the requirements for classification in building material class B1 if they pass the fire pit test and meet the requirements for building material class B2.

JE BELGELENDIA

PR33-F01/08.10.2015/Rev:17.01.2017-R01

Page 3 / 6





EUROLAB LABORATUVAR HİZMETLERİ TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

RESULTS

		Results of the Numune test (part		
Row-no.	Foil-type:	1) Measurements test specimen		
		RIO FR		
1	No. of test specimen arrangement according to DIN 4102, part 15, table 1	-		
2	Max. flame height above bottom edge cm Time 1) min: s	8 cm 10 s		
3	Melt through / burn through Time ¹⁾ min : s	120		
4	Observations on the backside of the specimens Flames/smouldering Time 1) min : s	-		
5	Discolouration Time 1) min : s	20 s		
6	Burning droplets Start 1)	-		
7	Extent sporadic burning droplets continually falling particles min : s	-		
8	Falling particles which burns Start 1) min: s	-		
9	sporadic falling parts	-		
10	continually falling particles	-		
11	Duration of the burning on the screen bottom (max.) min : s	120 s		
12	Interference of the burner flame by dripping /falling particles Time 1) min : s	-		
13	Early termination of the test End of burning at the specimen 1) min: s			
14	Time of early cancellation of the test 1) min: s	-		
	Continuous burning after termination of the test	-		
15	Duration min: s	-		
16	Number of specimens	1		
17	Front side of the specimen	- 1		
18	Back side of the specimen	-		
19	Flame length cm	7 cm		
20	Smouldering after termination of the test Duration min: s	-		
21	Number of specimens	-		
	Location	-		

PR33-F01/08.10.2015/Rev:17.01.2017-R01




Page 4 / 6





EUROLAB LABORATUVAR HİZMETLERİ TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

				Results of the Numune test (part 1)		
Row-no.	Foil-type:	Measurements test specimen		s test specimen		
			RIO FR			
22	Lower half of the specimens		-			
23	Upper half of the specimens		-			
24	Front side of the specimen		-			
	Backside of the specimen					
	Smoke development		-			
	< 400 % x min		-			
	> 400 % x min		-			
	Diagram in appendix					
	Residual lengths		_			
	Single values	cm				
	Average values	cm				
	Photo of the specimen on page		-			
	Smoke temperature		119 °C			
	Maximum value of the averaged values ^o C Time ¹⁾	min : s				
	Diagram in appendix Nr.		- 1			

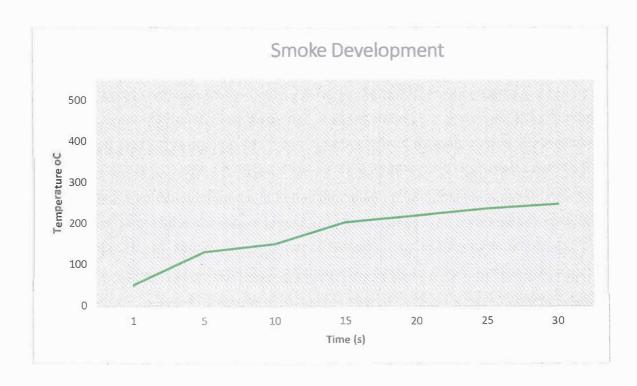




Page 5 / 6





EUROLAB LABORATUVAR HİZMETLERİ TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

IMAGE OF SAMPLE

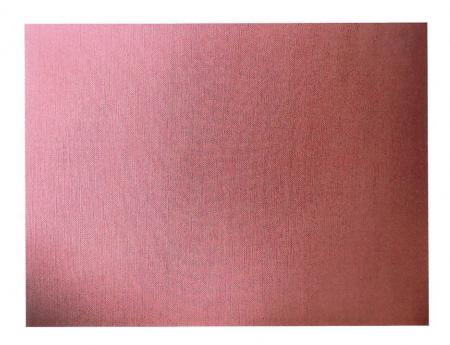

*** End of Report***

THE BELGELEND AND A STATE OF THE BELGELEND A STATE OF THE BELGELEND AND A STATE OF THE BELGELEND A STATE OF THE BELGELEND A STATE OF

PR33-F01/08.10.2015/Rev:17.01.2017-R01

Page 6 / 6